

This is to certify that

### Bapatla College of Pharmacy

has successfully completed

CARBON FOOTPRINT & ENERGY AUDIT

The study was completed by Rekhapalli Environmental Solutions & Technologies Pvt Ltd

RAVIRAU

Dr Rekhapalli Srinivasa Rao

Green, Eco & Energy Lead Auditor Certified ISO-14001 Auditor













Issued by

Rekhapalli Environmental Solutions & Technologies Pvt Ltd ()

December 2022

## BAPATLA COLLEGE OF PHARMACY

KOTHAPALEM, BAPATLA, ANDHRA PRADESH



Carbon Footprint and Energy Audit

### **CONTENTS**

04 Acknowledgement

**05 Executive Summary** 

07 Carbon footprint & Opportunities

14 Energy efficiency

20 Conclusion

# Acknowledgements

**REST Pvt Ltd** 



Dr Rekhapalli Srinivasa Rao Green, Eco & Energy Lead Auditor Certified ISO-14001 Auditor

15 December 2022

### Carbon Footprint & Energy Audit

The REST Pvt Ltd acknowledges with thanks the cooperation extended to our team for completing the study at Bapatla College of Pharmacy (BCP).

The interactions and deliberations with BCP team were exemplary and the whole exercise was thoroughly a rewarding experience for us. We deeply appreciate the interest, enthusiasm, and commitment of BCP team towards environmental sustainability.

We are sure that the recommendations presented in this report will be implemented and the BCP team will be further improve their environmental performance.

Kind regards

Your sincerely

Dr Rekhapalli Srinivasa Rao

Green, Eco & Energy Lead Auditor Certified ISO-14001 Auditor REST Pvt Ltd

# **Executive Summary**

The growth of countries across the world is leading to increased consumption of natural resources. There is an urgent need to establish environmental sustainability in every activity we do. In a modern economy, environmental sustainability will play a critical role in the very existence of an organization.

An educational institution is no different. Built environment, especially an educational institution, has a considerable footprint on the environment. Impact on the environment due to energy consumption, water usage and waste generation in an educational institute is prominent. Therefore, there is an imminent need to reduce the overall environmental footprint of the institution.

As an Institution of higher learning, Bapatla College of Pharmacy (BCP) firmly believes that there is an urgent need to address the environmental challenges and improve their environmental footprint.

True to its belief, BCP has not installed any solar panels and installed LED lights, REST Pvt Ltd team congratulates BCP team for their efforts.

Keeping BCP work in energy efficiency, we recommend the following to be taken by the competent team at BCP:

Work towards achieving carbon neutrality: INDC emphasizes creating an additional carbon sink of 2.5 to 3 billion tonnes of CO2 equivalent through additional forest and tree cover by 2030. BCP's net carbon emission for the year 2021-22 is >50MT CO2e. BCP should focus on energy efficiency, renewable energy, and carbon sequestration as tools that will enable them to offset the present carbon emissions and achieve carbon neutrality.

**Installation of solar rooftop:** Renewable energy plays a very important role in improving the environmental footprint of an organization. By increasing the share of renewable energy in BCP's energy portfolio, the overall carbon footprint of the college can be reduced. The roof area available at BCP is around 69796sq.ft on roof top. For the available area, roof top solar panels can be occupied with 100 kW of solar PV. As an initial step, BCP could look at installing 25kW of solar PV which can generate 40,500 units per year. Still the renewable share will also reduce the 33 MT CO2 eq. For the current assessment year power consumption to reduce, roof top can be utilized for solar power to expand.

Increase the operating power factor: Presently, based on the energy bills, it is understood that the institution maintains a power factor of 0.85. Since the institution pays electricity bills for the KVAH consumed, the lower the power factor, higher is the energy bill for the same KWH consumption. It is recommended to install capacitor banks to improve the power factor and save energy bill. BCP can save up to Rs. 20,000 per month.

Improve energy efficiency of the college: It is recommended to adopt latest energy efficient technologies for reducing energy consumption in fans, lighting, and air conditioners. We recommend the following projects to be implemented at the earliest:

- Replace conventional 70W ceiling fans with energy efficient BLDC fans of 30W
- Install air conditioners energy savers to save energy in split air conditioners
- · Replace all conventional tube lights with LED lamps

# Carbon Footprint and Energy Audit

Bapatla College of Pharmacy (BCP) and REST Pvt Ltd are working together to identify opportunities for improvement in energy efficiency and carbon reduction. This report highlights all the potential proposals for improvement through the audit and analysis of the data provided by BCP for lighting, air conditioning, ceiling fans, and biogas potential.

The report also details the carbon emissions from college operations. For carbon emissions, scope 1 and scope 2 emissions are calculated from the data submitted by BCP. The report emphasizes the GHG emission reduction potential possible through a reduction in power consumption.

#### Submission of Documents

"Carbon footprint and energy audit at BCP was carried out with the help of data submitted by BCP team. BCP team was responsible for collecting all the necessary data and submitting the relevant documents to REST Pvt Ltd for the study.

#### Note

Carbon footprint and energy audit are based on the data provided by BCP team and discussions the REST Pvt Ltd team had with BCP team. The scope of the study does not include the exclusive verification of various regulatory requirements related to environmental sustainability.

REST Pvt Ltd has the right to recall the study if it finds (a) major violation in meeting the environmental regulatory requirements by the location and (b) occurrence of major accidents, leading to significant damage to ecology and environment.





# Opportunities for improvement

As a part of the overall environmental improvement study at BCP, carbon footprint calculations were also carried out. The objective of calculating the carbon footprint of the campus is find the present level of emissions from campus operation and what initiatives that the BCP can take to offset the emissions. By offsetting the emissions, the college can become carbon neutral in the future by adopting energy efficient processes, increase in renewable energy share and tree plantation.

Carbon footprint calculations:

To help delineate direct and indirect emission sources, improve transparency, and provide utility for different types of organizations and different types of climate policies and business goals, three "scopes" (scope 1, scope 2, and scope 3) are defined for GHG accounting and reporting purposes.

For calculating carbon footprint of the campus, Scope 1 & Scope 2 emissions are being considered. Since day scholars use college provided transportation and hostelers stay in campus, Scope 1 and Scope 2 are the highest contributor to overall emissions. For this reason, Scope 3 is not being calculated.

Scope 1: Direct GHG Emissions

Direct GHG emissions occur from sources that are owned or controlled by the company, for example, emissions from combustion in owned or controlled DG sets, canteen, vehicles, etc.; emissions from chemical production in owned or controlled process equipment. Direct CO2 emissions from the combustion of biomass shall not be included in scope 1 but reported separately.

BCP Scope 1 emissions for 2021-22:

Sources of Scope 1 emissions in BCP:


- 1) Diesel used for college-owned transportation: 425 liters/year
- 2) Diesel consumption for the generator for the assessment year 2021-22 is minimum (included in above consumption).

3) LPG used for canteen: 750cylinders/year

Scope 2: Electricity Indirect GHG Emissions

Scope-1 Emissions

S.no	Fuel Type	Description	Activity data	Units	CO2 eq. emissions (Tons)
1	LPG	Canteen	7.5	MT	31.65
2	Diesel & Petrol	Transportation	0.425	KL	1.06

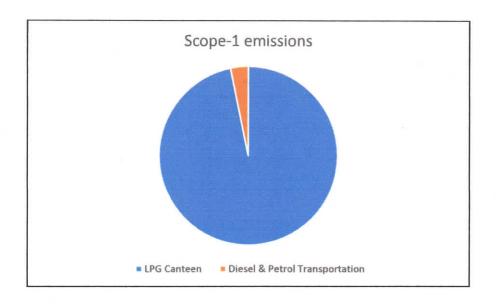



Scope 2 accounts for GHG emissions from the generation of purchased electricity consumed by a company. Purchased electricity is defined as electricity that is purchased or otherwise brought into the organizational boundary of the company. Scope 2 emissions physically occur at the facility where electricity is generated.

BCP Scope 2 emissions for 2022: Electricity purchased from grid is 25826 units.

Scope-2 Emissions		
Electricity Purchased from grid	4.77	MT CO2 eq

Total Emissions	Offset/Avoided emissions	Net Emissions
Scope-1	32.71	MT Co2 eq
Scope-2	4.77	MT Co2 eq
Total	37.48	MT Co2 eq

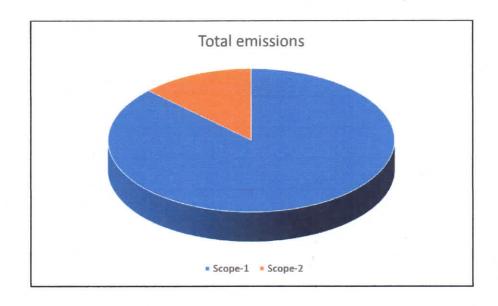

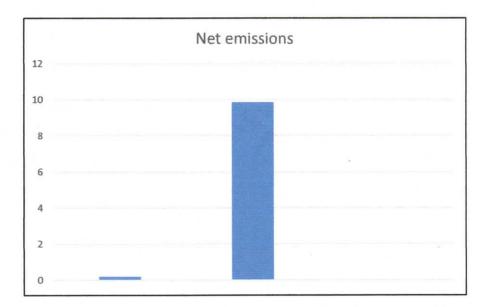

# Develop a roadmap to increase contribution of renewable energy in the overall energy consumption

To have a continued focus on increasing renewable energy utilization to 100% which will also lead to reduction in GHG emissions, it is suggested to develop a detailed roadmap on RE utilization. The road map should broadly feature the following aspects -

- Renewable energy potential of BCP and the maximum offset that can be achieved at BCP
- Percentage substitution with renewable energy that BCP wants to achieve in a specified time frame

### Key tasks that need to be executed to achieve the renewable energy target

- Specific financial break up for each of the projects highlighting the amount required, available and the utilization status as on date
- A regular review mechanism to ensure progress along the lines of the roadmap should be framed
- The roadmap should also highlight important milestones/key tasks, anticipated bottle BCP & proposed

### Renewable energy roadmap should be used as a base to frame GHG emissions reduction target

It is suggested to use the developed renewable energy roadmap to correlate the GHG reduction that each of the renewable energy project will achieve. This approach will provide a base to set targets for reduction in GHG emissions. The action plan for renewable energy will shoulder the action plan for GHG emissions reduction and work towards achieving carbon neutrality.

### Explore the option of other onsite and offsite renewable energy projects

The renewable energy field has been witnessing many private investors due its increased market demand and attractive policies in many states. There are Renewable Energy Independent Power Producers (RE IPPs) who have installed RE based power plants like wind, small hydro and solar PV. GOC can consider having a long-term power purchase agreement with these RE IPPs in purchasing fixed quantity of power for a period of 5 to 10 years.

"Evolve a system to monitor the implementation of various GHG mitigation opportunities BCP has an action plan to reduce its GHG emissions. BCP should also evolve a system to monitor the implementation of various GHG mitigation opportunities. It is recommended to use a Gantt chart to mark out the action plan for the activities and track its implementation. Gantt chart will serve as an excellent way to instantly monitor and comprehend all different tasks in one place which would ease tracking of implementation.

#### Calculation for Installation of 25 kWp of Solar PV in BCP campus

Renewable energy is one of the important steps to be taken up by the college to reduce their overall carbon footprint. Based on the details provided by BCP team, The roof area available at BCP is around 69796sq.ft on roof top. For the available area, roof top solar panels can be occupied with 100 kW of solar PV. As an initial step, BCP could look at installing 25kW of solar PV which can generate 40,500 units per year. Still the renewable share will also reduce the 33 MT CO2 eq. For the current assessment year power consumption to reduce, roof top can be utilized for solar power to expand.

### RESCO model for solar rooftop installation:

A Renewable Energy Service Company (RESCO) is an ESCO Energy service company which provides energy to the consumers from renewable energy sources. RESCO or BOOT model is about pay as Ju consume the electricity.

- Solar Power Plant is owned by the RESCO or Energy Company
- Customer must sign a Power purchase Agreement (PPA) with actual investor at mutually agreed tariff and tenure
- Customer only pays for electricity consumed
- RESCO developer is responsible for its annual operations & maintenance (O&M)
- The RESCO gets the benefit by selling the surplus power generated to the DISCOM



# **Energy Efficiency**

Annual energy consumption of BCP campus is 25826 units from electricity board. There are major blocks in the campus which consumes energy for their operation. Major energy consumers are:

- 1. Fans
- 2. Air conditioners


#### Replace conventional tube lights with LED lamps

### Replace Conventional Ceiling Fans with Energy Efficient BLDC Fans

During the Energy Audit at BCP, a detailed study was carried out to identify the potential for replacing the existing ceiling fans with BLDC super fans. There is 15.3kW power consumption by fans operating in BCP campus.

Instead of conventional ceiling fans, latest technology BLDC fans which consume only 30W can be installed in the newly constructed building. A brushless DC (BLDC) motor is a synchronous electric motor powered by direct-current (DC) electricity and having an electronic commutation system, rather than a mechanical commutator and brushes. A BLDC motor has an external armature called the stator, and an internal armature called the rotor.

The rotor can usually be a permanent magnet. Typical BLDC motor-based ceiling fan has much Letter efficiency and excellent constant RPM control as it operates out of fixed DC voltage. The proposed BLDC motor and the control electronics operate out of 24V DC through an SMPS having input AC which can vary from 90V to 270V. The operational block diagram of a BLDC motor is as follows:

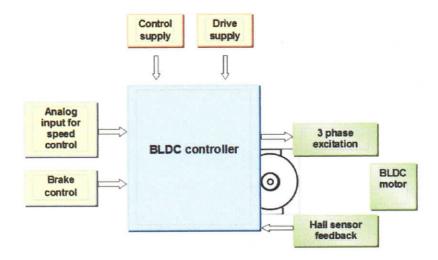



With the replacement of existing ceiling fans with Super Fans the energy consumption is likely to reduce by 55% per fixture. Considering 100 fans being replaced with super-efficient BLDC fans, 3.50 kW can be saved. Considering the average operating hours to be 2000 and unit cost as Rs.

9.0, the calculations are as follows:

Total power consumption by fans in college:

153 x 100W = 15.3kW

No, of fans considered for calculation

100 (First cycle of change)

Energy consumption per fan

100 W

Total energy consumption of fans

100W X 100 fans

10 kW

Super-efficient BLDC fans energy consumption:

30 W

Savings from 100W to 30 W

70%

Total savings in fans energy consumption

70% of 10kW

7 kW

Savings per year

7kW x 2000 hrs X Rs. 9.0/unit

: Rs. 1.26 Lakhs

Investment

NO. 1.20 LUNI

Rs. 2, 50,000

: 24 months

Annual emission reduction potential in case of replacing 50% fans: 20MT CO2

### Install Air conditioners energy saver for spilt air conditioners:

Present status: As per the data obtained from BCP team, the campus has majorly 6 Ton of Refrigeration units installed.

#### Recommendation:

We recommend installing "Airtron", an energy saver that can be installed at every individual unit of AC. The Airtron is the world's most advanced AC SAVER, with all the controls of a Precision AC. The Airtron's dual sensors reference the Room and Coil & Ambient Temp, and uses complex, multiple algorithms in a "closed-loop circuit" to reduce the Compressor Run-Time, to ensure the high savings while maintaining and displaying the Set temperature accurately. The Airtron is Programmable for geographical location and climate and adapts automatically to changes in season and ambient conditions.

This unique device has been developed on Patent-Published technology and approved by leading MNC'S, PSU'S and Govt. Departments. The Airtron is validated by EESL (Energy Efficiency Services Ltd.), Ministry of Power, Government of India, for 44% savings. The Airtron has been validated on all AC's- Inverters, 5 Star, Splits, Multi-Splits, Packages, ducts, Windows, Cassettes from 1.0 - 20.0 TR, LG Itd, Videocon Ltd, Tata Communications, L&T, Nestle, Ashok Leyland etc. The AIRTRON comes with a Remote for setting the Room Temperature, and in a Non-Flammable Polycarbonate Enclosure, with SMPS Power Supply, to tolerate w ide Voltage and Current fluctuations, Surges, Spikes and Sags.

In our case, Airtron installation can reduce the energy consumption of each fixture by 15% on a conservative basis. For a total energy consumption, for air conditioners, as 20 units per hour, 3 units per hour can be saved. It is recommended to install Airtron energy saver in a phase wise manner preferably in the batches of 10 units.

Saving Calculation: Considering the operating hours to be 2000 and unit cost as Rs 9.0/-.

Monetary annual savings : Rs 45,000/ Total investment : Rs 80,000/-

Payback period : 22 months (2 years)
 Annual emission reduction potential: 4.92 MT CO2



### Replace Conventional Lamps with LED Lamps

As per the data submitted, the total number of all the lighting bulbs & fixtures installed are

Power distribution from Lighting						
			Total wattage			
1. Normal bulbs	25	100	2500	watts		
2. LED bulbs	50	15	750	watts		
3. Normal fixtures	194	40	7760	watts		
4. LED fixtures	50	12	600	watts		
Т		al load	11610	watts		

Under failure replacement policy, at least 130 lamps can be changed in the first year.

Types of fixtures	36W Tube
No of fixtures	130
No of hours in Operation	2000

The campus should be keen in harnessing the day lighting available thereby reducing the use of artificial lighting.

Based on the occupancy, monitoring should be ensured to reduce excessive consumption of energy.

Major savings in energy through lighting fixtures can be achieved by replacing all the above existing fixtures with LED's meeting the required LUX levels. The LED's being less energy consuming while maintaining the equivalent lux is the more sustainable option. The replacement of lighting fixtures should be done as per failure replacement policy i.e. change the old fixture with LED when it fails

#### Advantages of LED

 Lower energy consumption: The energy consumption of LEDs is low when compared to the other conventional sources for the same amount of Lumen output.

Performance comparison of different type lights

Type of Lamp	Lumen/Watt	CRI	Life hours
HPSV lamps	90-120	Bad (22-25)	15,000-20,000
Metal Halide lamps	65-100	Good (65-90)	18,000
LED lamps	100-150	Very Good (>80)	10,000-12,000

- High S/P ratio: LEDs have higher scotopic/photopic ratio (S/P ratio). The eye has two primary light sensing cells called rods and cones cones function in day light and process visual information whereas rods function in night light. The cone dominated vision is called photopic and the rod dominated vision is called scotopic. The S/P ratio indicates the measure of light that excites rods compared to the light that excites cones. In office environments, illumination is more effective if the S/P ratio is high as it is under scotopic region. LEDs hence are ideally suited for these applications as they have a high S/P ratio.
- Longer life-time: LEDs have longer life time of around 1,00,000 hours. This is equivalent to 11 years of continuous operation or 22 years of 50% operation.
- Faster switching: LED lights reach its brightness instantly upon switching and can frequently be switched on/off without reducing the operational life expectancy.
- Greater durability and reliability: As LEDs are solid-state devices and uses semi-conductor material; they are sturdier than conventional sources that use filaments or glass. LEDs can

also withstand shock, extreme temperatures and vibration as they don't have fragile materials as components.

 Good Colour Rendering Index (CRI): The colour rendering index, i.e., measure of a light sources' ability to show objects as perceived under sunlight is high for LEDs. The CRI of natural sunlight is 100 and LEDs offer CRI of 80 and above.

LED offers more focused light and reduced glare. Moreover, it does not contain pollutants like mercury. LED technology is highly compatible for solar lighting as low-voltage power supply is enough for LED illumination.

### Calculations are as follows:

Existing Lighting fixtures	36W
Existing power consumption(kW)	4.5kW (130lamps)
Proposed LED wattage (W)	15
LED power consumption (kW)	1.95kW
Energy saving (kW)	2.55kW
Opearting hours	2000

Annual monetary savings

Rs 38,250/-

Investment needed

Rs 90,000/-

Payback period

2.5 years

Annual Emission reduction potential:

4.18MT of CO2.

## Conclusion

BCP has initiated few energy efficiency activities in their campus. While REST Pvt Ltd appreciates the BCP team for their efforts, we would like to emphasize that opportunity exists further reduce the energy consumption. Installation of renewable energy is to be given major focus. RESCO model can be adopted to install renewable energy without upfront capital investment. We in REST Pvt Ltd are sure that all the recommendations mentioned in the report will be implemented by BCP team and the overall environmental performance of the campus will be improved.